




Serie **SPLIT-BODY ANSI600**

Articolo **760200**

**STAINLESS STEEL**

Flanged ANSI 600 stainless steel AISI 316 and carbon steel A350-LF2 ball valve, full bore, ANSI B16.10, face to face dimension, Fire Safe Antistatic Device.

Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

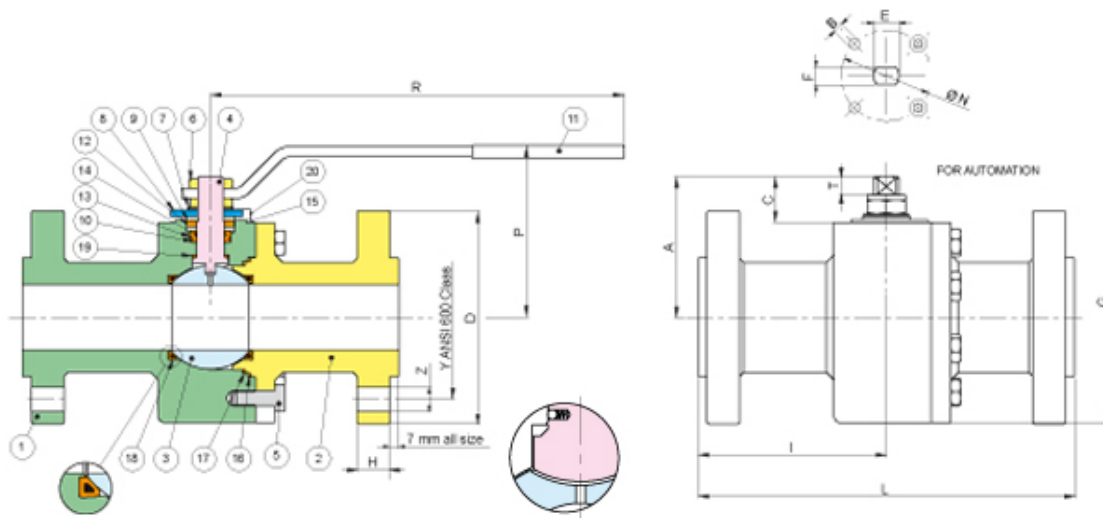

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	A182-F316/F316L	1
2	END CONNECTION	A182-F316/F316L	1
3	BALL	A479-Tp316/A351-CF8M	1
4	STEM	A479-Tp316	1
5	SCREW	STAINLESS STEEL	4-8
6	NUT	STAINLESS STEEL	2
7	SPRING WASHER	STAINLESS STEEL	2
8	90° STOP	STAINLESS STEEL	1
9	PACKING GLAND	A182-F316	2
10	STEM SEAT	P.T.F.E	1
11	HANDLE	STAINLESS STEEL	1
12	STEM SEAL	GRAPHOIL	1
13	O-RING	FKM (VITON)	1
14	O-RING	FKM (VITON)	1
15	WASHER	A182-F304	2
16	BODY SEAT	GRAPHOIL	1

17	BODY SEAT	P.T.F.E	1
18	BALL SEAT	P.T.F.E + MET/R P.T.F.E	2
19	THRUST WASHER	P.T.F.E	1
20	SCREW	STAINLESS STEEL	2

MISURA SIZE	DN	D	Y	Z	H	I	L	G	P	R	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	95	66,7	4 X Ø16	14,3	82,5	165	85	131	88	52,5	19,5	8	M10	7	42- F04	M5	19,2	100	4,10
3/4"	20	115	82,6	4 X Ø19	15,9	95,5	191	95	131	92	56	19,5	8,5	M10	7	42- F04	M5	35,0	100	6,00
1"	25	125	89	4 X Ø19	17,5	108	216	108	174	110	72,5	27,5	13	M12	8	50- F05	M6	64,5	100	8,90
1"1/2"	40	155	114,5	4 X Ø22	22,3	120,5	241	159	251	131	107	32	13	M16	10	50- F05	M6	174,0	100	20,00
2"	50	165	127	8 X Ø19	25,4	146	292	163	321	133	109	35,5	14	M20	14	70- F07	M8	301,3	100	25,50
3"	80	210	168,5	8 X Ø22	31,8	178	356	208	381	156	132	40	16	M24	18	102- F10	M10	872,5	100	52,00
4"	100	275	216	8 X Ø26	38,1	216	432	261	381	186	165	43	18	M24	18	102- F10	M10	1363,3	100	97,00