




Serie **SPLIT-BODY ANSI150**

Articolo **766000**

**STAINLESS STEEL**

Flanged ANSI 150 stainless steel AISI316 - CF8M and carbon steel WCB ball valve, full bore, with ISO 5211 pad direct, ANSI B 16.10 face to face dimension, Fire safe, antistatic device

Limiti di temperatura: -10° +160° - Temperature range: -10° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

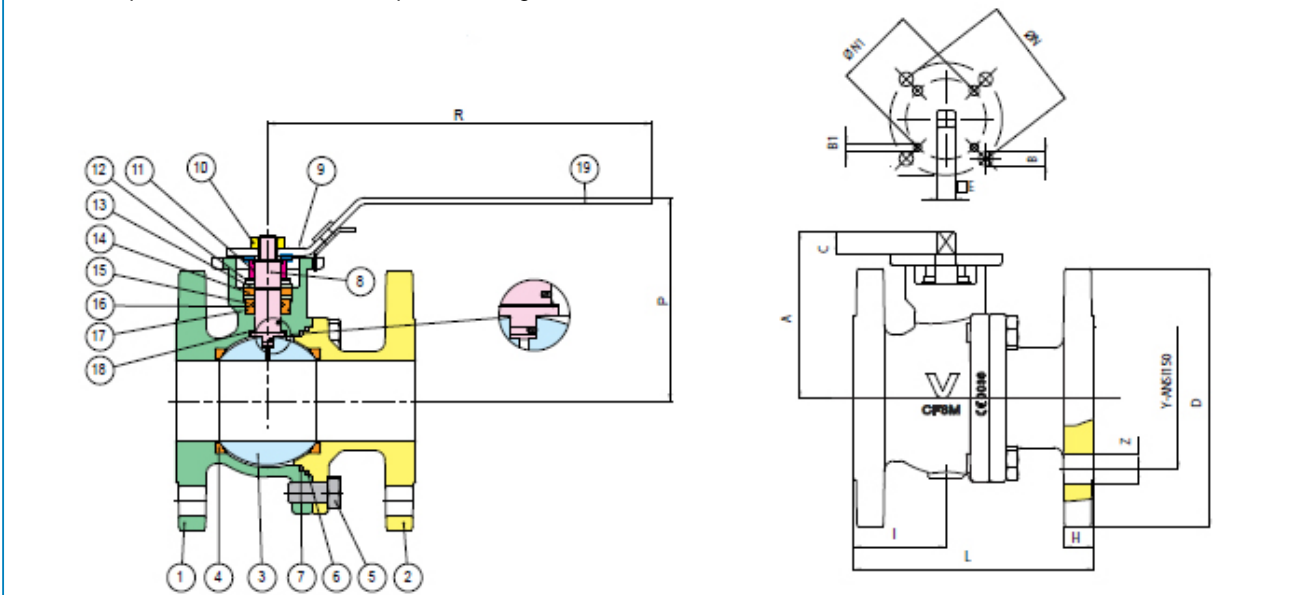

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	A351-CF8M	1
2	END CONNECTION	A351-CF8M	1
3	BALL	A479-Tp316/A351-CF8M	1
4	BALL SEAT	P.T.F.E	2
5	SCREW	STAINLESS STEEL	4-8
6	BODY SEAT	GRAPHOIL	1
7	BODY SEAT	P.T.F.E	1
8	STEM	A479-Tp316	1
9	SCREW	STAINLESS STEEL	1
10	NUT	STAINLESS STEEL	1
11	NUT	STAINLESS STEEL	1
12	SPRING WASHER	STAINLESS STEEL	2
13	BUSH	A182-F316	2
14	STEM SEAT	GRAPHOIL	1
15	O-RING	FKM (VITON®)	1
16	STEM SEAT	P.T.F.E	1

17	O-RING	FKM (VITON®)	1
18	THRUST WASHER	P.T.F.E	1
19	HANDLE	STAINLESS STEEL	1

MISURA SIZE	DN	D	Y	Z	H	I	L	P	R	A	C	E	ØN	B	ØN1	B1	Kv	PN	Kg
1/2" *	15	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3/4" *	20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1"	25	110	79,5	4X16	14,7	54	127	93	160	69	11	9	50-F05	7	-	-	64,5	20	3,80
1"1/2"	40	130	98,5	4X16	17,9	76	165	118	240	94	14	11	70-F07	8,5	50-F05	M6	174,0	20	7,00
2"	50	150	102,5	4X19	19,5	84,5	178	127	240	103	13,5	11	70-F07	8,5	50-F05	M6	301,3	20	9,60
3"	80	190	152,5	4X19	24,3	93	203	162	320	137,5	17,5	14	102-F10	11	70-F07	M10	872,5	20	17,90
4"	100	230	190,5	8X19	24,3	99,5	229	177	380	153,5	19	17	102-F10	11	70-F07	M10	1363,3	20	24,30

\* Art.760005