




Serie **SPLIT-BODY ANSI150**

Articolo **762000**

CARBON STEEL

Flanged ANSI 150 stainless steel AISI 316-CF8M and carbon steel WCB ball valve, full bore, ANSI B16.10 face to face dimension, Fire Safe, Antistatic Device.

Limiti di temperatura: -10° +160° - Temperature range: -10° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

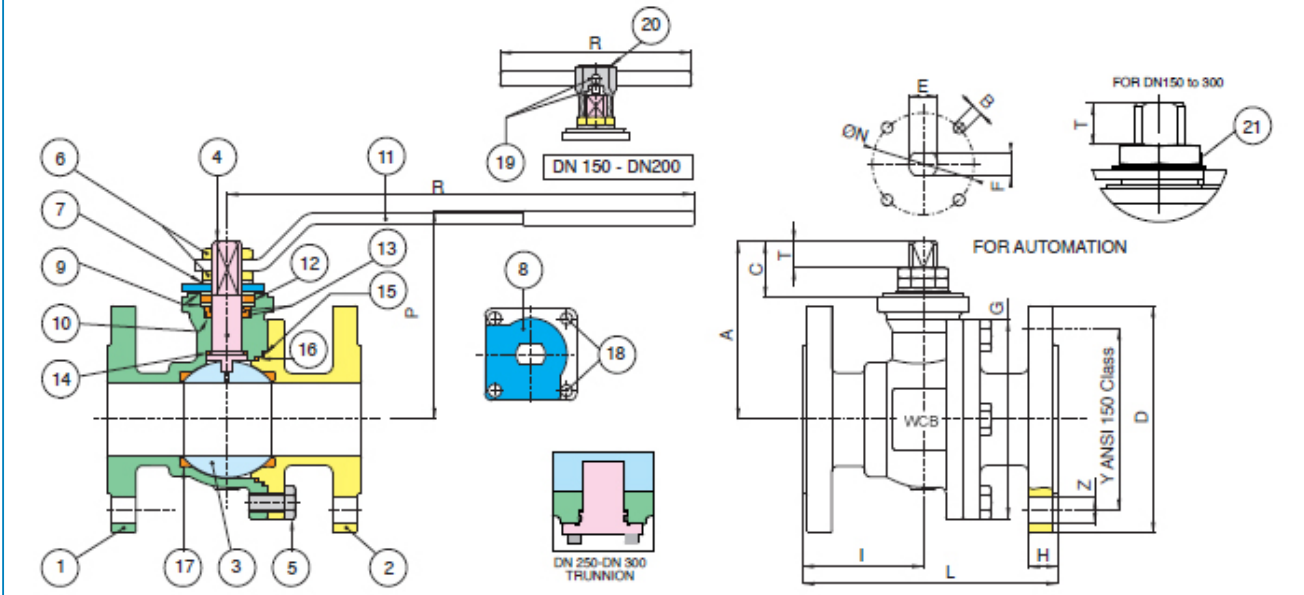

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	A216-WCB	1
2	END CONNECTION	A216-WCB	1
3	BALL	A479-Tp304/A351-CF8	1
4	STEM	A479-Tp304	1
5	SCREW	CARBON STEEL	4-8-12
6	NUT	CARBON STEEL	1-2
7	SPRING WASHER	CARBON STEEL	2
8	90° STOP	CARBON STEEL	1
9	PACKING GLAND	A182-F316	2
10	STEM SEAT	P.T.F.E	1
11	HANDLE	CARBON STEEL	1
12	STEM SEAL	GRAPHOIL	1
13	O-RING	FKM (VITON®)	2
14	THRUST WASHER	P.T.F.E	1
15	BODY SEAT	GRAPHOIL	1

16	BODY SEAT	P.T.F.E	1
17	BALL SEAT	P.T.F.E	2
18	SCREW	CARBON STEEL	2
19	SCREW	CARBON STEEL	2
20	BODY HANDLE DN150-200	EN-GJL 250	1
21	UNSCREWING GROWER	A182-F316	1

MISURA SIZE	DN	D	Y	Z	H	I	L	G	P	R	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	90	60,5	4 X Ø16	11,5	46,5	108	71	88	131	52	19	8	M10	7	42- F04	M5	19,2	20	1,91
3/4"	20	100	70	4 X Ø16	13	53	117	73,5	93	131	56	19	8	M10	7	42- F04	M5	35,0	20	2,43
1"	25	110	79,5	4 X Ø16	14,5	59,5	127	90,5	89	174	72,5	27,5	13	M12	8	50- F05	M6	64,5	20	3,70
1"1/2	40	125	98,5	4 X Ø16	17,5	77	165	114	133	250	106	30	10	M16	10	50- F05	M6	174,0	20	7,10
2"	50	150	120,5	4 X Ø19	19,5	86	178	136,5	144	321	122	38,5	18	M20	14	70- F07	M8	301,3	20	10,80
3"	80	190	152,5	4 X Ø19	24	79,5	203	178,6	173	381	151	43	18	M24	18	102- F10	M10	872,5	20	21,60
4"	100	230	190,5	8 X Ø19	24	110	229	208,6	187	381	165	43	18	M24	18	102- F10	M10	1363,3	20	30,40
6"	150	280	241,5	8 X Ø22	25,5	181	394	311	305	700	245	68	41	M42	30	125- F12	M12	3671,1	20	78,00
8"	200	345	298,5	8 X Ø22	29	212	457	402	348	700	288	68	41	M42	30	125- F12	M12	6816,6	20	124,60
10" *	250	405	362	12 X Ø26	32,2	301,8	533	500	-	-	353	81	47	M52	38	140- F14	M16	11170,7	20	195,00
12" *	300	485	431,8	12 X Ø26	33,8	353,8	610	560	-	-	384	81	47	M52	38	140- F14	M16	16805,6	20	254,00

* TRUNNION fornita senza leva - supplied without handle.

Disponibili anche nella versione V Ball - V Ball version available.